RIVEREDGE ROAD

FOSTER ROAD

PROPOSED BENCH (TYPICAL)

PROPOSED 80' X 80' LARGE DOG PARK (WITH 6" OF 3/8" NATURAL PEA GRAVEL OVER FILTER FABRIC)

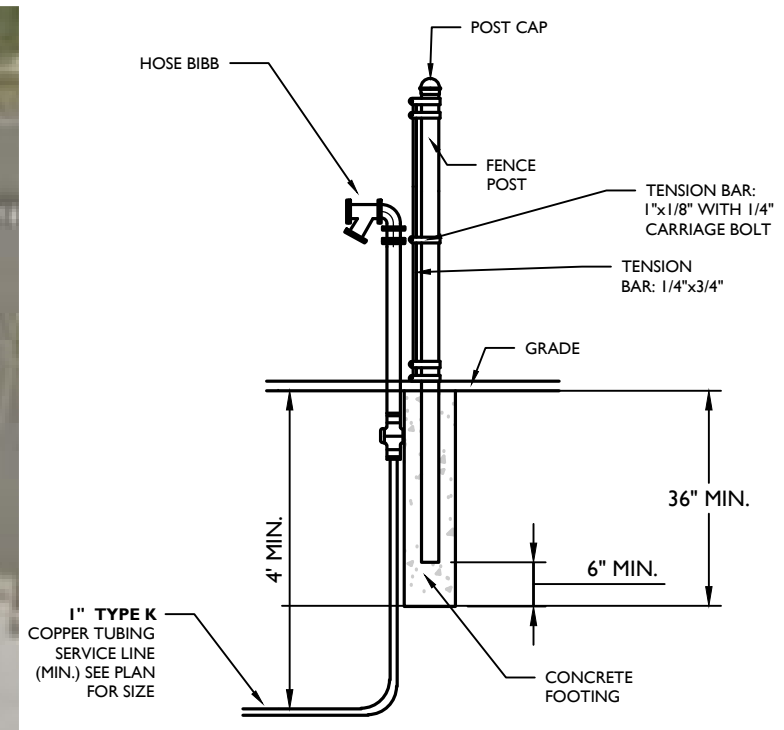PROPOSED 8x8' DOUBLE GATE (TYPICAL)

HOSE BIBB SEE DETAIL

PROPOSED TRASH RECEPTACLE WITH WASTE BAG DISPENSER (TYPICAL)

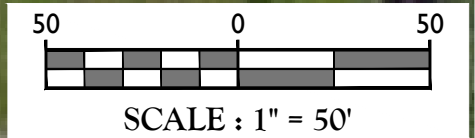PROPOSED 40'X 40' SMALL DOG PARK (WITH 6" OF 3/8" NATURAL PEA GRAVEL OVER FILTER FABRIC)

PROPOSED 4' CHAIN-LINK FENCE (TYPICAL)

PROPOSED WATER SERVICE

TAP INTO EXISTING WATER, EXACT LOCATION TO BE DETERMINED IN FIELD BY CONTRACTOR

HOSE BIBB DETAIL

POST CAP

HOSE BIBB

FENCE POST

TENSION BAR: 1"x1/8" WITH 1/4" CARRIAGE BOLT

TENSION BAR: 1/4"x3/4"

GRADE

36" MIN.

4' MIN.

6" MIN.

1" TYPE K COPPER TUBING SERVICE LINE (MIN.) SEE PLAN FOR SIZE

CONCRETE FOOTING

DESCRIPTION

DRAWN BY

DATE

REV

MUNICIPAL COMPLEX DOG PARK FOR
BOROUGH OF TENAFLY BERGEN COUNTY NEW JERSEY

SCALE:	DATE:	DRAWN BY:	CHECKED BY:
AS SHOWN	07/31/2018	TDC	MO

PROJECT NUMBER: TFB-581
DRAWING NAME: TENAFLY DOG PARK

SHEET TITLE:
EXHIBIT PLAN

SHEET NUMBER: 1 of 1

50   0   50

SCALE : 1" = 50'